


# TELEHANDLER ROTATING TYPE




## MRT1440 Easy



Rotation on stabilizers with forks

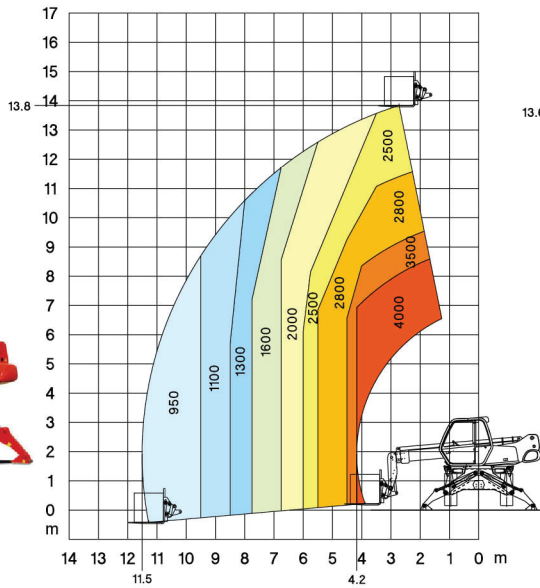


Frontal position on tires with forks

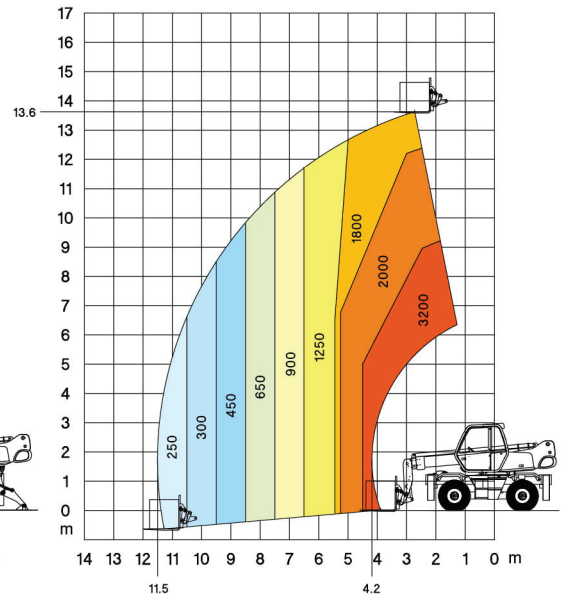

### Dimensions

MAKER	MANITOU
Model	MRT1440 Easy
Max. Lifting Height (m)	13.80
Max. Outreach (with Forks) (m)	11.50
Lifting Capacity (on Stabilizers) (kg)	4000
Turret Rotation (°)	400
Drawbar Pull (daN)	8600
Gradeability (°)	21.8
Min. Frame Outer Turning Radius (m)	3.90
GVW (kg)	12490
Max. Travel Speed (km/h)	32.00
<b>Qualifications</b>	
■ When working	Depends on the attachment
■ When driving on public roads	Large special license required

(mm)

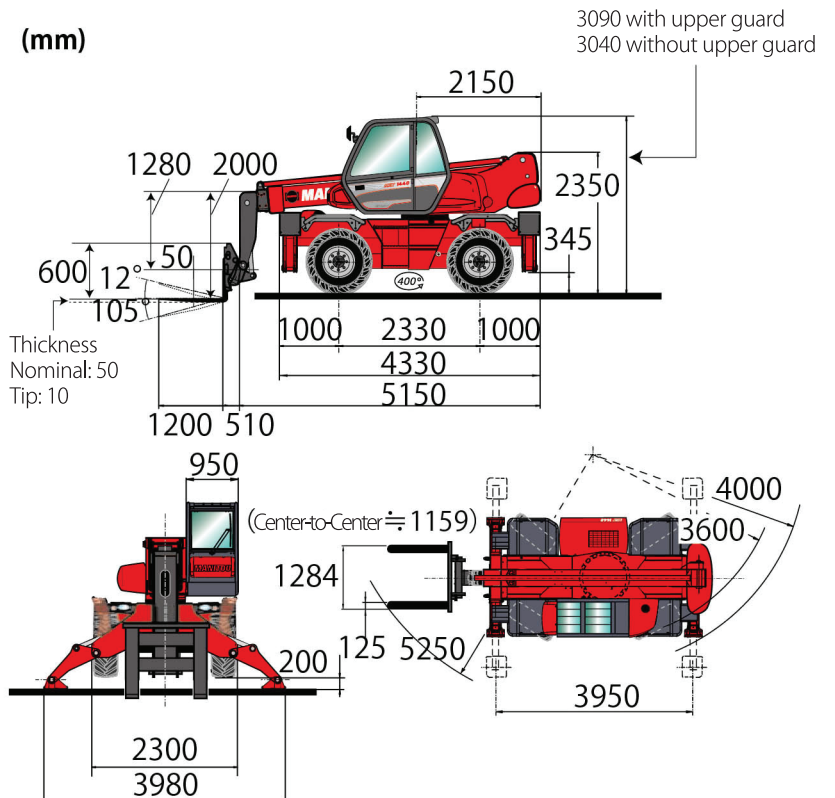


※ Engine complies with European Stage 3B emission standards.


※ The attachments are interchangeable, refer to page 61 for details.

# TELEHANDLER ROTATING TYPE


**Rotation on stabilizers with  
PSE 4400 / 365 D platform**

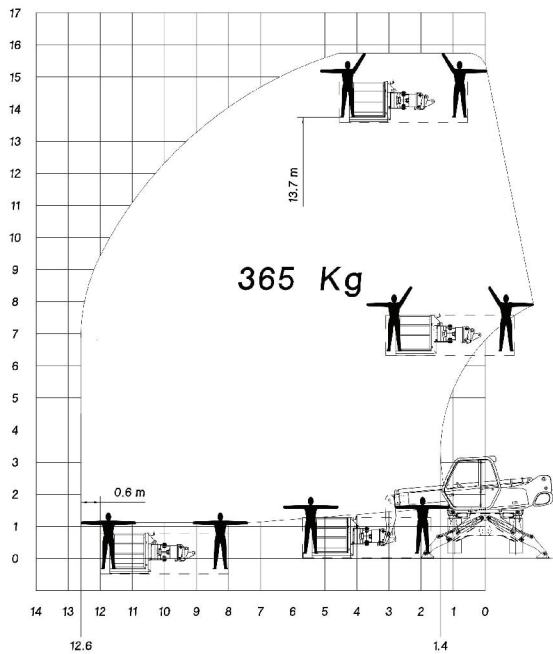

**Rotation on stabilizers with  
PSE 4400 / 700 D platform**

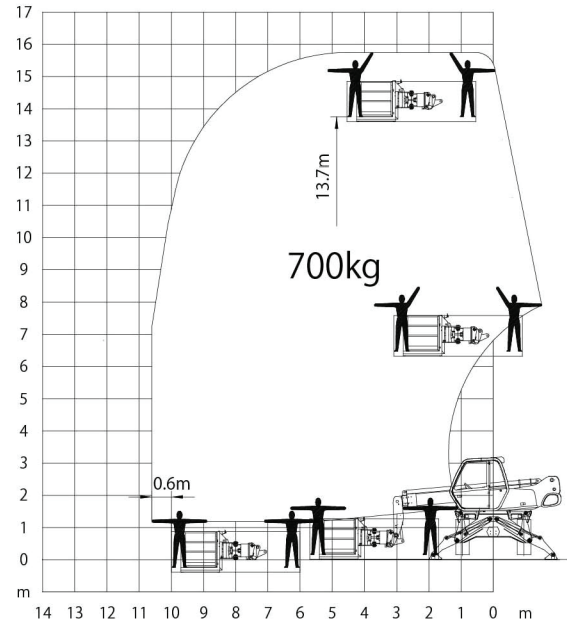

**Rotation on stabilizers with  
extension jib with winch PT2000**

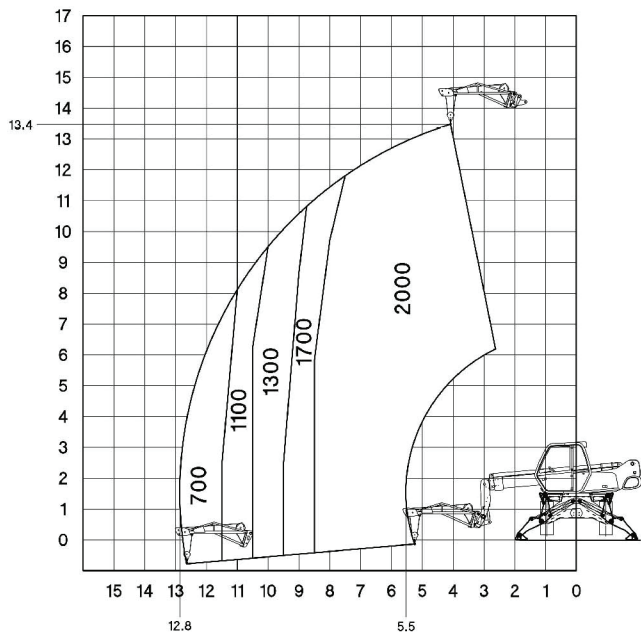

**Rotation on stabilizers with  
1m³ bucket CBR1000**

