


Technical sheet :

MHT 790




作業能力	
定格荷重	9000kg
荷重中心	600mm
最大作業高さ	6.84m
重量と寸法	
車輛総重量（フォーク仕様）	13160kg
m4-グランドクリアランス	0.4m
y-ホイールベース	2.87m
b1-全幅	2.47m
h17-全高	2.47m
b4-キャブ幅	0.93m
a5-フォークの角度（下）	125°
a4-フォークの角度（上）	12°
wa1-最小回転半径外輪	5.59m
フォーク(長さ×幅×厚さ)	1200mm×200mm×60mm
タイヤ	
種類/サイズ	Aeolus-TLAGP23/445/65R22,5
数量（前/後）	2/2
操舵輪（前・後）	2/2
駆動輪（前・後）	2/2
ステアリングモード	4輪駆動-3ステアリングモード
エンジン	
メーカー	JohnDeere
環境基準	欧州排ガス規制4次適合
型式	4045PWL
シリンダー	4気筒-4500cm ³
最大出力	141HP/104kW
最大トルク	534Nm@1500tr/min
エンジン冷却装置	水冷式
バッテリー電圧/蓄電容量	12V/180Ah
牽引力	10905daN
トランスミッション	
変速装置	ハイドロスタティック
変速段数（前方/後方）	2/2
走行スピード	31km/h
パーキングブレーキ	自動パーキングブレーキ
制動ブレーキ	油圧式湿式多板ディスクタイプ
登坂能力	48%
油圧システム	
油圧ポンプ	ロードセンシングポンプ
油圧システム/設定圧	180l/min-270Bar
タンク容量	
エンジンオイル	13 l
作動油	148 l
燃料	147 l
アドブルー尿素	12 l
騒音と振動	
走行時の騒音レベル（LpA）	79.7dB(A)
音響パワーレベル（LwA）	103dB(A)
その他	
安全装置	Cab ROPS-FOPSLevel2
操作機構	JSM

寸法図

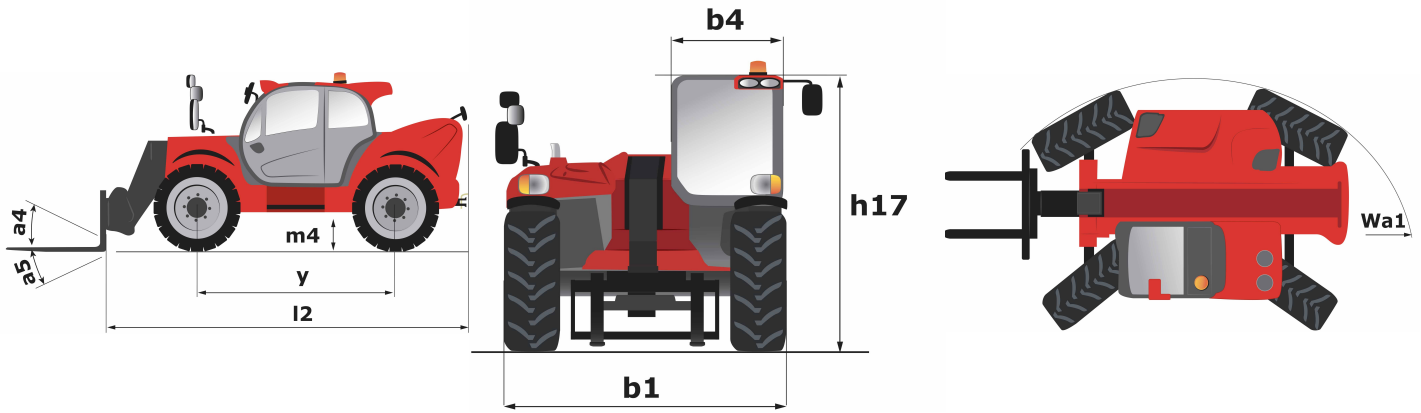


作業半径図

フォークLC600mm
TFF9t
Ref.939800

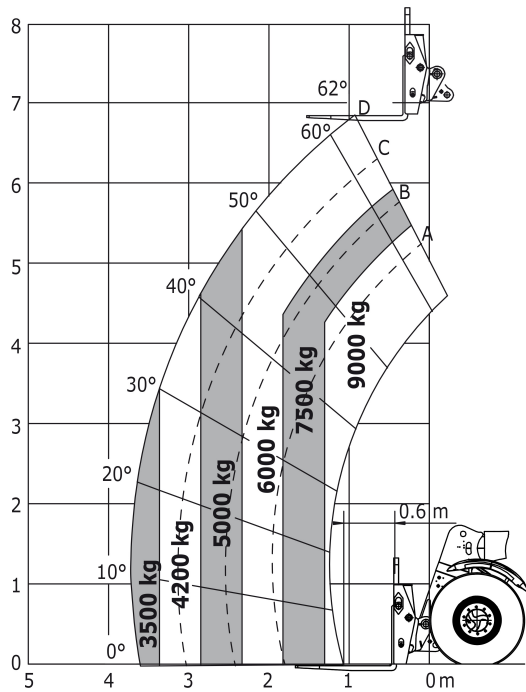


ANNEXE B

ウィンチ
Winch9T
Ref.939030

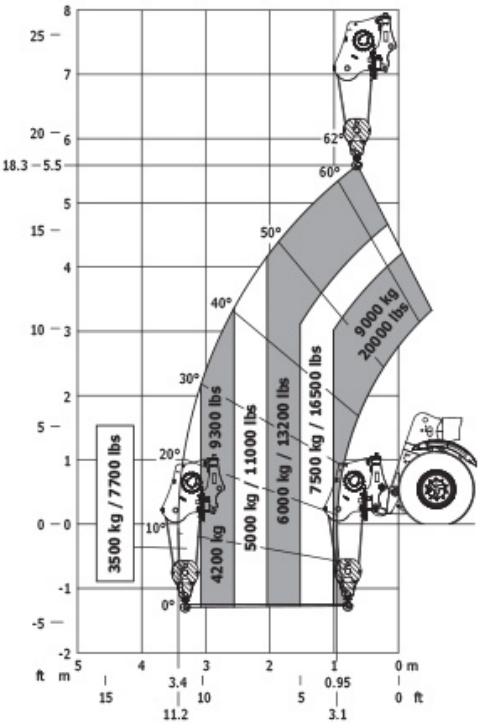

ジブ
P9T
Ref.930830

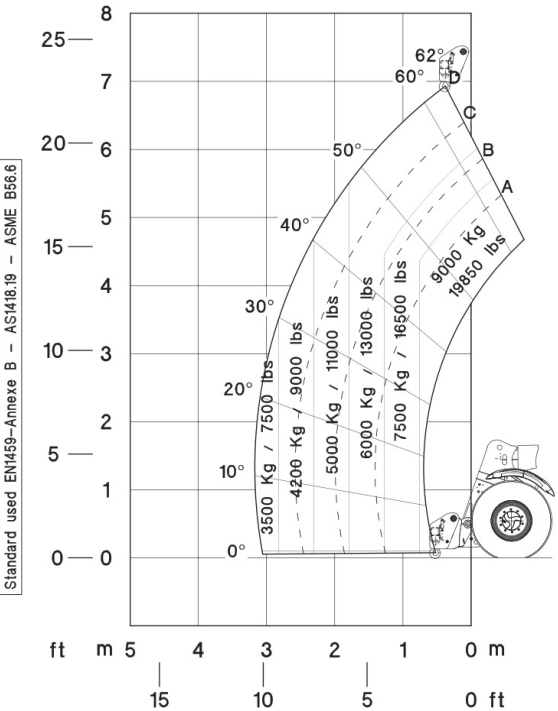



Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes