




		MT 732
<b>作業能力</b>		
定格荷重(フォーク仕様)		3200 kg
最大作業高		6.90 m
最大作業半径		3.94 m
最大掘起力 (バケット仕様ISO 8313)		5770 daN
<b>作業速度</b>		
ブーム上げ		6.8 s
ブーム下げ		5.8 s
ブーム伸ばし		6.8 s
ブーム縮め		4.7 s
フォーク上げ		3 s
フォーク下げ		2.9 s
タイヤサイズ		400/80-24
<b>制動装置</b>		
サービスブレーキ		油圧式湿式多板ディスクタイプ
パーキングブレーキ		オイル封入型多板ディスク(前後軸)
<b>エンジンメーカー</b>		
タイプ		DEUTZ - STAGE 3B- Final Tier IV
排気量		TD 3.6 L
最大出力		3621 cm <sup>3</sup>
最大トルク		75 cv/55.4 kW
燃料噴射システム		330 Nm
冷却システム		直噴
牽引力		水冷
変速装置		8 000 daN
後退シフト		トルクコンバーター
変速段数(前方/後方)		電子油圧制御
最高走行速度		4/4
ステアリングモード		25 km/h
操作機構		4輪ステアリング - 3 モード
<b>油圧システム</b>		
ポンプ		JSM® ジョイスティック
許容量		過負荷防止装置 - EN15000 Norm
作動油		ギアポンプ(プライオリティバルブ付)104 l/min - 260 bar
燃料		
車両総重量 (フォーク仕様)		
<b>寸法</b>		
C. オーバーハング (前方)		1.19 m
B. ホールベース		2.81 m
I. オーバーハング (後方)		0.76 m
D. 全長		4.76 m
G1. グランドクリアランス		0.45 m
J. キャブ幅		0.89 m
F. タイヤ間中心距離		1.93 m
W. 全幅		2.34 m
U1. 全高		2.30 m
フォーク (長さ x 幅 x 厚さ)		1200 x 125 x 45 mm
最小回転半径外輪		3.80 m
フォーク角度 (上向き/下向き)		13° / 134°
<b>騒音と振動</b>		
走行時の騒音レベル (LpA)		78 dB
音響パワーレベル(LwA)		104 dB
振動加速度 (手/腕)		<2.50 m/s <sup>2</sup>

mm	
A	1200
B	2810
C	1193
C1	1128
D	4761
D1	4696
D2	4193
E	5961
F	1930
G	450
G1	435
G2	435
I	758
J	890
K	1260
L	45
N	1715
O	125
P2	38°
P3	53°
R	3598
S	6398
T	3490
U	2299
U2	2488
V	4800
V1	1310
V2	3800
W	2340
Y	13°
Z	134°

## Rough Terrain Load Chart

standard EN1459 B

### Machine on tyres with forks

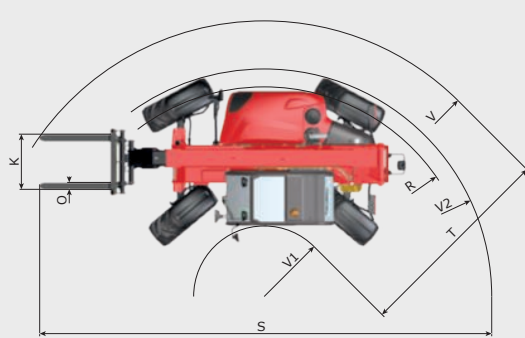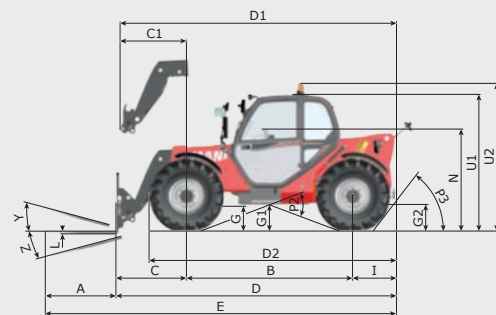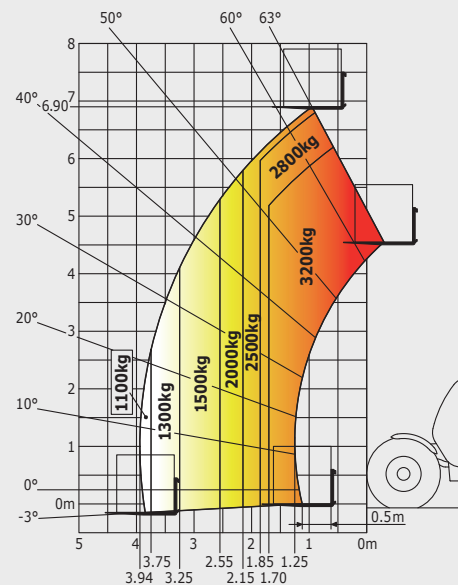

This brochure describes versions and configuration options for MANITOU products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. MANITOU reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your MANITOU dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of MANITOU and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39 547 824 euros - 857 802 508 RCS Nantes

