


Technical sheet :

MHT 10230




| 作業能力 | |
|----------------|-------------------------|
| 定格荷重 | 23000kg |
| 荷重中心 | 900mm |
| 最大作業高さ | 9.65m |
| 最大作業半径 | 5.8m |
| 重量と寸法 | |
| 車輛総重量（フォーク仕様） | 29300kg |
| m4-グランドクリアランス | 0.49m |
| y-ホイールベース | 3.9m |
| b1-全幅 | 2.85m |
| h17-全高 | 3.05m |
| b4-キャブ幅 | 0.93m |
| a5-フォークの角度（下） | 105° |
| a4-フォークの角度（上） | 12° |
| wa1-最小回転半径外輪 | 5.4m |
| フォーク(長さ×幅×厚さ) | 1800mm×110mm×200mm |
| タイヤ | |
| 種類/サイズ | Aeolus-18.00R25AIN47 |
| 数量（前/後） | 2/2 |
| 操舵輪（前・後） | 2/2 |
| 駆動輪（前・後） | 2/2 |
| ステアリングモード | 4輪駆動-3ステアリングモード |
| エンジン | |
| メーカー | Mercedes |
| 環境基準 | 欧州排ガス規制4次適合 |
| 型式 | OM934LA.E4-3 |
| シリンダー | 4気筒-5100cm ³ |
| 最大出力 | 176HP/129kW |
| 最大トルク | 1600Nm@1600tr/min |
| エンジン冷却装置 | 水冷式 |
| バッテリー数 | 2 |
| バッテリー電圧/蓄電容量 | 12V/120Ah |
| 牽引力 | 18500daN |
| トランスミッション | |
| 変速装置 | ハイドロスタティック |
| 変速段数（前方/後方） | 2/2 |
| 走行スピード | 24.9km/h |
| パーキングブレーキ | 自動パーキングブレーキ |
| 制動ブレーキ | 油圧式湿式多板ディスクタイプ |
| 登坂能力 | 34% |
| 油圧システム | |
| 油圧ポンプ | 可変ポンプ |
| 油圧システム/設定圧 | 205l/min-350Bar |
| タンク容量 | |
| エンジンオイル | 21l |
| 作動油 | 290l |
| 燃料 | 315l |
| アドブルー尿素 | 63l |
| 騒音と振動 | |
| 走行時の騒音レベル（LpA） | 80dB(A) |
| 音響パワーレベル（LwA） | 107dB(A) |
| 振動加速度（手・腕） | 2.5m/s |
| その他 | |
| 安全装置 | Cab ROPS-FOPSLLevel2 |
| 操作機構 | JSM |

寸法図

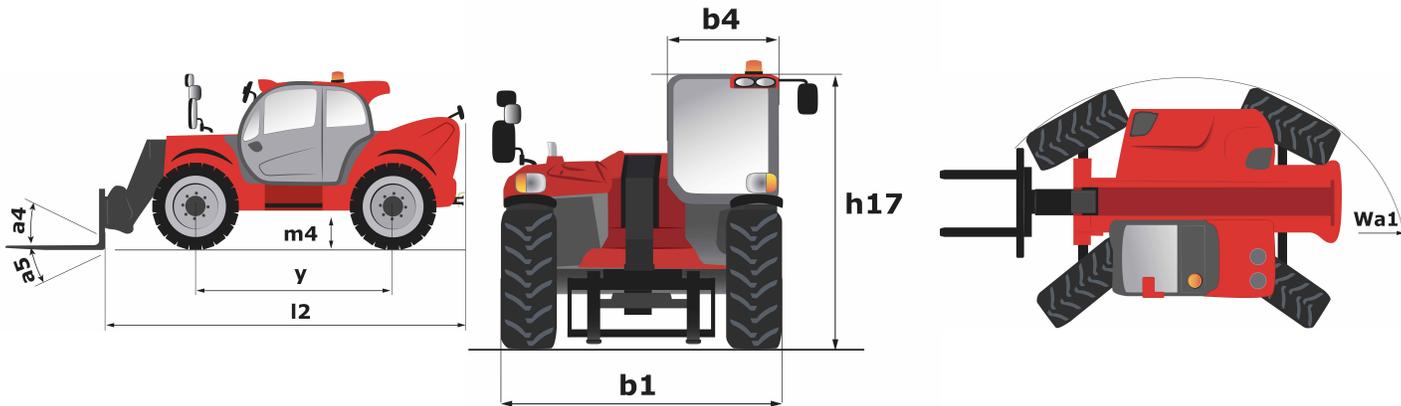


作業半径図


フォーク(TFF23t) LC900mm
Ref.53011384

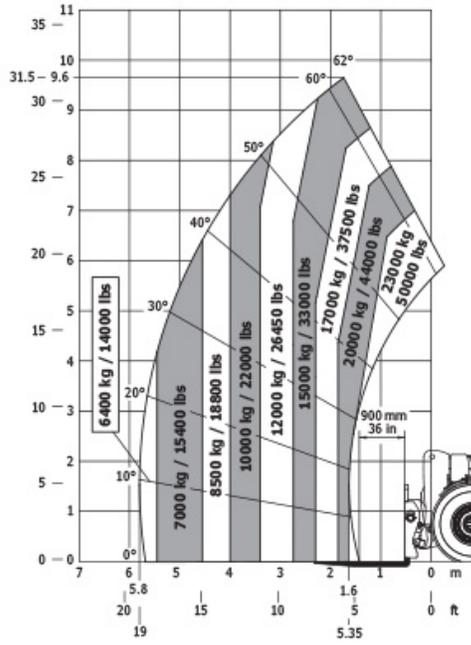


フォーク(TFF23t) LC1200mm
Ref.53011384

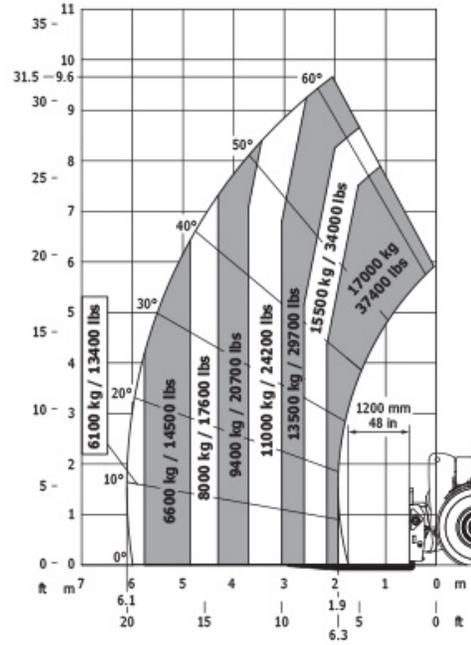

ジブ(P25T)
Ref.53010431with52623065

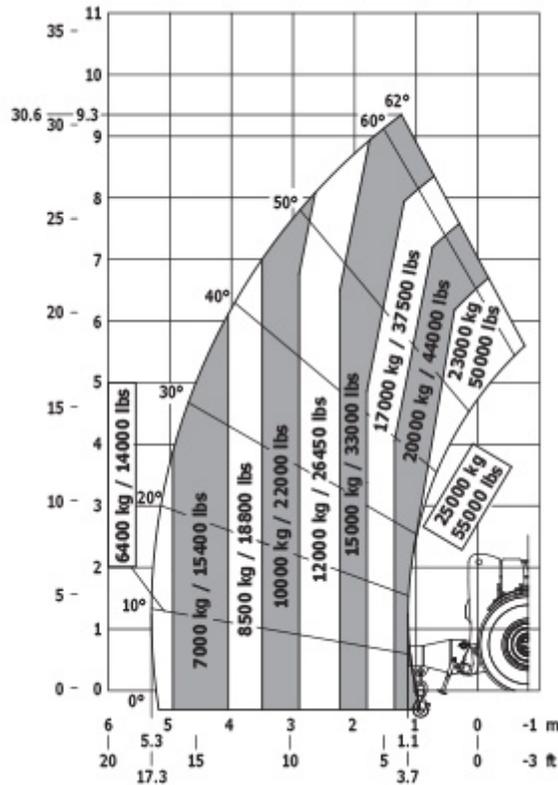

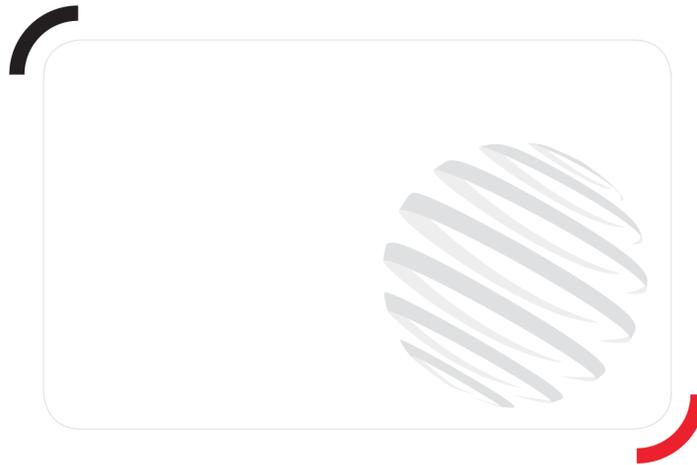

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes