Technical sheet:


MT 733 EASY






作業能力	
定格荷重	3300kg
最大作業高さ	6.9m
最大作業半径	3.9m
最大掘起力	5770daN
重量と寸法	
111-全長(フォーク付け根まで)	4.74m
b1-全幅	2.33m
h17-全高	2.3m
y-ホイールベース	2.81m
m4-グランドクリアランス	0.45m
b4-キャブ幅	0.89m
Wa1-最小回転半径外輪	3.8m
車輛総重量(フォーク仕様)	6700kg
タイヤ	空気圧式(チューブレス)
スタンダードタイヤ	Alliance400/80-24-162A8
フォーク(長さ×幅×厚さ)	1200mm×125mm×45mm
作業速度	
リフト上	8.3s
リフト下	6s
伸縮(伸)	7.3s
伸縮(縮)	4.5s
チルト(上)	3.4s
チルト (下)	2.8s
エンジン	2.00
メーカー	Deutz
環境基準	欧州排ガス規制5次適合
型式	TD3.6L
シリンダー	4気筒-3621c㎡
定格出力	75HP/55.4KW
最大トルク	340Nm @1600tr/min
牽引力	8360daN
トランスミッション	
変速装置	トルクコンバーター
変速段数(前方/後方)	4/4
走行スピード	24.9km/h
パーキングブレーキ	マニュアル
制動ブレーキ	油圧式湿式多板ディスクタイプ
車軸	DANA
油圧システム	57,101
油圧ポンプ	ギアポンプ
油圧システム/設定圧	92.7 I/min/260Bar
タンク容量	Service Management of the Company
エンジンオイル	101
作動油	1281
燃料	1201
騒音と振動	1201
趣目と加到 走行時の騒音レベル(LpA)	79dB(A)
き響パワーレベル (LwA)	104dB(A)
振動加速度(手・腕)	2.5Nm
振動加速及 (手・腕) その他	2.514111
操舵輪(前・後)	2/2
駆動輪(前・後)	2/2
学 (別・後) 安全装置 マ全装置 (対・後) (対・(表) (対・(A) (i) (対・(A) (i) (i) (i) (i) (i) (i) (i) (i) (i) (i	Z/Z 過負荷防止装置EN15000/Cab ROPS-FOPSLevel2
操作機構	週頁何奶正要自EN150007 Cab ROPS-FOP Scevel2
3木 ト/阪/円	191/1

寸法図








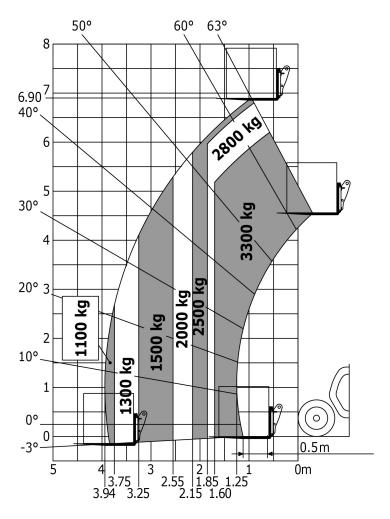

フォーク PFB35N Ref.415618

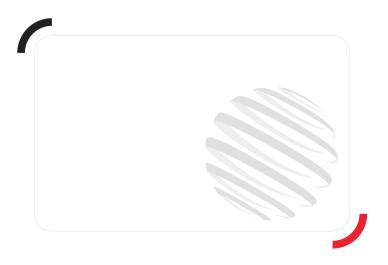



Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes